

S²NAP[®] - Specifications

Remote Data Acquisition & Processing Module



Rapid & Flexible Wireless Deployment

Physical Characteristics

Size: 11.6" x 9.4" x 4.3" (29.5 cm x 23.9 cm x 10.9 cm), 7 lb (3.2 kg)

Mounting: 10.75" x 6.0" (27.3 cm x 15.2 cm)

Power: 100—240 VAC, 50—60 Hz, <1A

Environmental: NEMA-4

Operating Temperature (design): -40 to +85 C


Connectors:

External: Sensor I/O - BNC Connectors

Internal: Power - Screw Terminal Blocks

Ethernet - RJ45

RS-232 - DB9

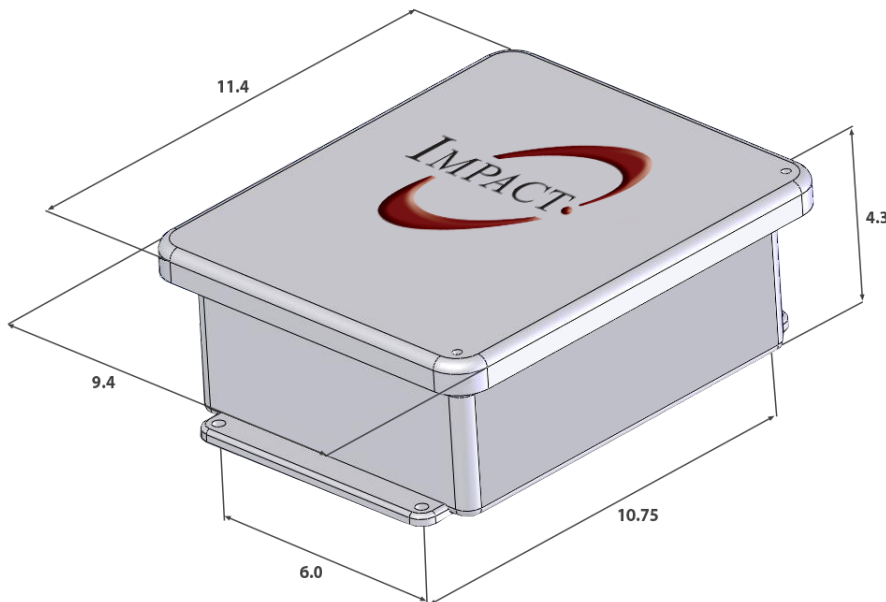

impact-tek.com

© 2010, Impact Technologies, LLC

Headquarters New York Office

200 Canal View Boulevard
Rochester, NY 14623
Phone: 585.424.1990
Fax: 585.424.1177

Pennsylvania Office

270 Walker Drive, Suite 200W
State College, PA 16801
Phone: 814.867.5122
Fax: 814.867.7550

Georgia Office

75 Fifth Street NW, Suite 312
Atlanta, GA 30308
Phone: 404.526.6188
Fax: 404.526.6189

Provides a cost-effective means for acquiring and processing high-speed dynamic data.

Detailed Capabilities

